

# GSME-X20


*Industrial-suited, parameterizable fire gas detector with multiple semiconductor gas-sensors, integrated signal evaluation and M-Bus interface for potentially explosive areas.*

## Characteristics

- Type-tested for ATEX zone 20 and 21
- Robust design due to aluminum enclosure
- Highest moisture and dust resistance due to diffusion filter technology (IP64)
- Extremely safe against spurious alarms thanks to parameterizable sensitivity of all sensor elements
- Smoldering fire detection already in the incipient stage
- Sensor evaluation and sensitivity can be adapted to the application environment
- Low wiring effort due to common data and power transmission in a pre-assembled cable
- Can be integrated into existing fire alarm systems

## Applications

- For ATEX zones 20 and 21
- Enclosed conveyance sites for dust explosive materials
- Storage facilities and bunkers for self-igniting materials with explosion protection classification
- Drives, crushers, dryers, coolers, chutes and conveyor hoppers
- Silos and mills

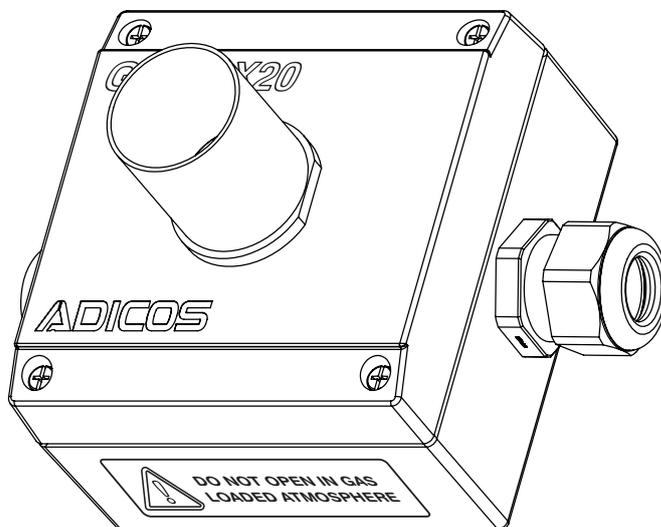

The Advanced Discovery System (ADICOS®) is used for early detection of fires in industrial environments. It is comprised of various, separate detector units. GSME fire gas detectors detect at an early stage gases that are characteristic for developing fires. They detect both open and concealed smoldering fires.


Four parameterizable semiconductor gas sensors monitor and evaluate the concentration curve of these gases according to multi-criteria technology. This enables the GSME detectors to distinguish real fires from interference signals. The sensor elements of the detectors are protected against the ingress of dust and moisture by sinter metal filter technology.

GSME-X20 detectors are type tested for potentially explosive areas of ATEX zones 20 to 22 according to ATEX and IECEx.

With the ADICOS software, all detector states and concentration curves can be displayed graphically. Sensitivities as well as alarm thresholds can be parameterized individually for each detector.

# GSME-X20 - Specification

## Mechanical dimensions

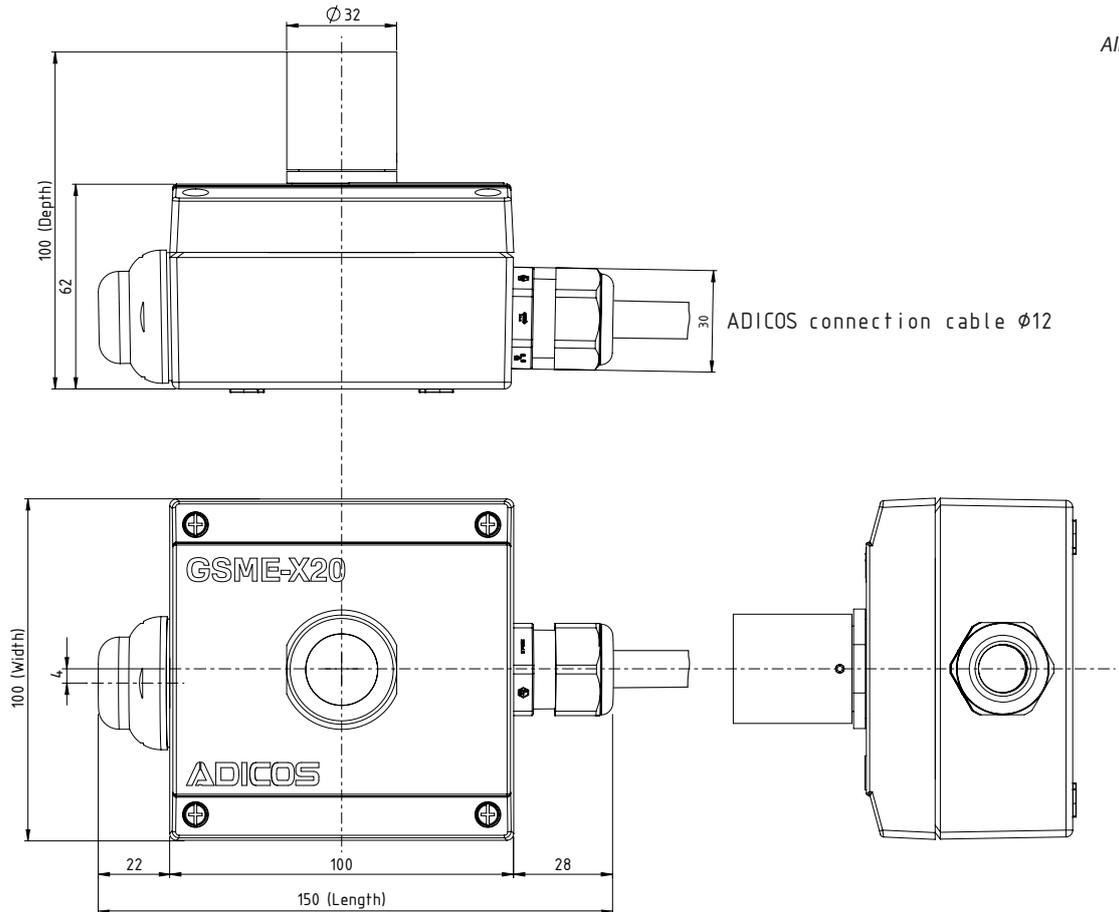

All dimensions in mm

## Mechanical properties

Enclosure	Coated die-cast aluminum (corrosion-resistant)
Weight	2 kg (7 m cable incl.)
Dimensions	150 mm x 100 mm x 100 mm (Length x Width x Depth) (cable gland and signal dome incl.)
Protection class	IP64
Explosion protection	 Ex ta III C 105°C Da
Device group	II, category 1D

## Thermal properties

Relative humidity	$\leq 95$ % relative humidity (non-condensing)
Temperature range	$-20 \dots +50$ °C

## Electrical properties

Supply voltage	DC 21,6 ... 40 V
Power consumption	4 VA / 14 VA (without / with heating)
Internal fusing	2 x 500 mA
M-Bus max. line length	$\approx 2$ km
M-Bus max. line capacity	$\approx 200$ nF
M-Bus baud rate	4800 baud
Potential-free contact alarm relay	20 mA max. (Alarm (NO))
Potential-free contact failure relay	40 V or 20 mA max. (Failure (NC))
Max. contact rating failure/alarm relay	DC 40 V; 70mA

Technical data subject to change without notice.



408-2410-002 EN33 - 03/2023 | page 2 / 4

# GSME-X20 - Specification

## Detection properties

Sensor combination	CO — H <sub>2</sub> — HC — NO <sub>x</sub>
Reaction time	> 30 s
Detection scenarios	Smoldering fires according to EN 54-7 Fires emerging from smoldering coals

## ADICOS wiring principle

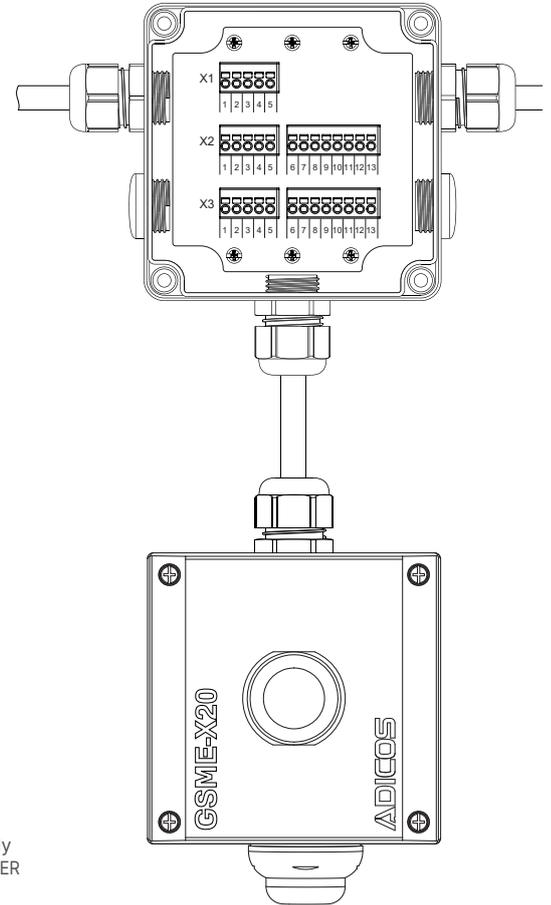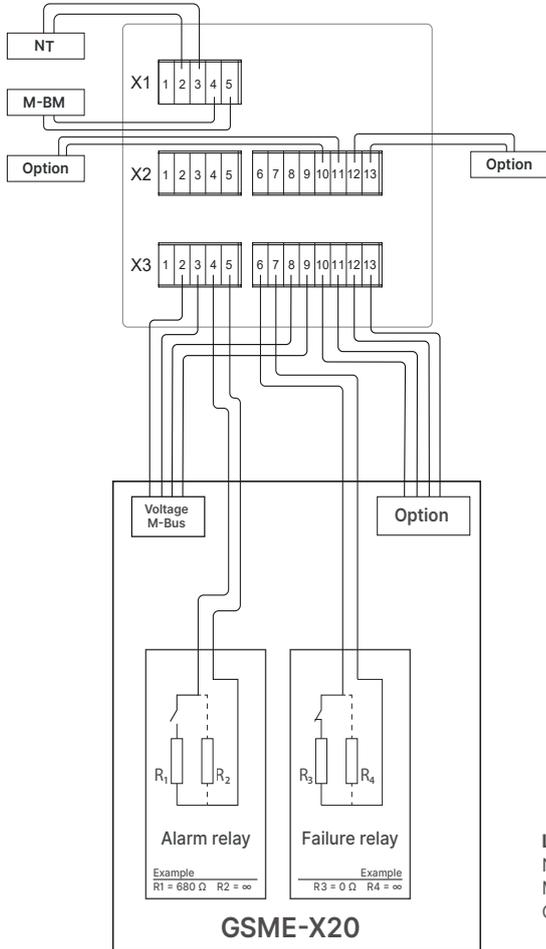

**Legend:**  
 NT External power supply  
 M-BM ADICOS M-BUSMASTER  
 Option Fire alarm panel or Pre-alarm auxiliary relay

### 12-pin cable, LEONI KERPEN ICONBASE

Wire	Color	Signal	Limit value contact
1	black	Operating voltage DC 21,6 ... 40 V non-polarised	
1	white		
2	black	Relay output X6 e	Alarm NO <sup>1</sup>
2	white	Relay output X6 a	Alarm NO <sup>1</sup>
3	black	Relay output X7 a	Fault NC
3	white	Relay output X7 e	Fault NC
4	black	M-Bus max. 40 V non-polarised	
4	white		

<sup>1</sup> with series resistor

### Option Auxiliary relay

Wire	Color	Auxiliary relay
5	black	-
5	white	Normally closed
6	black	Normally open
6	white	Common

### 12-pin cable, OELFLEX 415CP

Wire	Signal	Limit value Contact
1	Operating voltage DC 21,6 ... 40 V non-polarised	
2		
3	M-Bus max. 40 V non-polarised	
4		
5	Relay output X6 e	Alarm NO <sup>1</sup>
6	Relay output X6 a	Alarm NO <sup>1</sup>
7	Relay output X7 a	Fault NC
8	Relay output X7 e	Fault NC


<sup>1</sup> with series resistor

### Option Auxiliary relay

Wire	Auxiliary relay
9	Normally closed
10	-
11	Common
12	Normally open

# GSME-X20 - Application



## ADICOS wiring principle

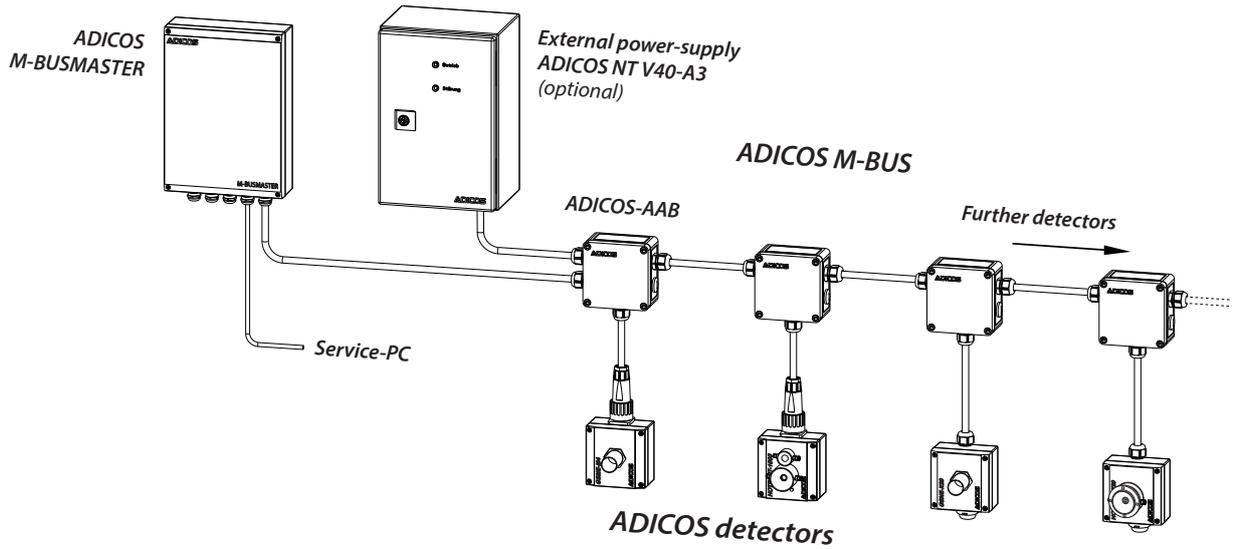

## Assembly


GSME-X20 must be mounted with the sintered metal filter down!

### ADICOS Mounting Plate

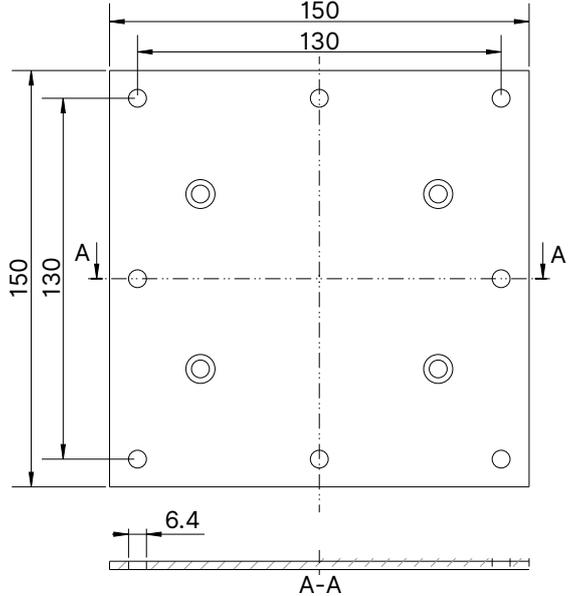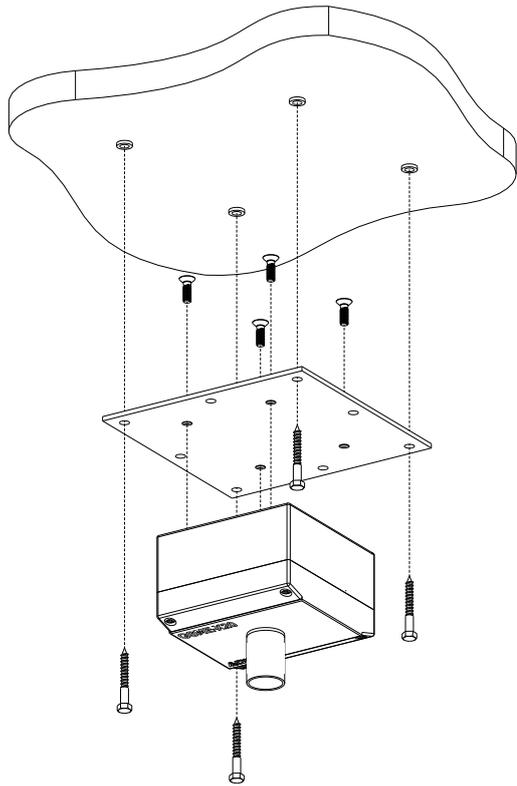

Material: Aluminum sheet, 3 mm  
 Mounting holes: 8 x Ø 6,4 mm,  
 Spacing 130 mm or 65 mm  
 or 183.8 mm (diagonal)

**Mounting scheme:**  
 Ceiling installation with ADICOS mounting-plate

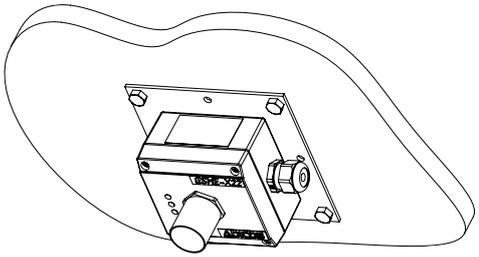

**Mounting example:**  
 Monitoring a conveyor belt  
 with ADICOS mounting plate and  
 custom galleys construction

