

Power Supply for FEMTO Amplifier Modules

Features	<ul style="list-style-type: none"> • Regulated stabilization DC ± 15 V • Low ripple and noise • Wide input range switch-mode power supply • Power cable type I Australia / NZ 	
Safety Instructions	<p>This power supply is exclusively designed for use with FEMTO amplifier modules. Before use, take care to follow general electrical safety rules and notice the information shown in this datasheet and at the type label on the power supply. Do not use visibly damaged power supplies. Do not use this power supply in security relevant applications or in chemically aggressive environment. Do not expose this power supply to unusual mechanical stress or vibrations. During use do not expose the unit to direct sunlight and do not cover it. Respect the general rules for fire prevention. No liability can be assumed for any consequential damage, provided this is not governed otherwise by applicable product liability laws and regulations. Use in original condition only, do not open, do not repair the unit. When operation is no longer possible or considered to be unsafe, the power supply must be taken out of service and be secured against unintended operation.</p>	
Environmental Protection	<p>FEMTO offers all end users in the EU the possibility to return "end of life" units without incurring disposal charges. If you wish to return a unit for waste recovery, please contact FEMTO for further information. Do not dispose of the unit in a litter bin or at a public waste disposal site.</p>	
Safety and EMI Requirements	<p>The unit bears the CE mark. A complete declaration of CE-conformity is available upon request. The manufacturer declares that this product meets the requirements and the intents of the following standards, normative documents and directives: UL 60950-1, UL/CUL 62368-1 2nd edition, CSA C22.2, FCC 47 CFR PART15 SUBPART B, EMC Directive 2014/30/EU, Low Voltage Directive 2014/35/EU; Energy Requirement DoE LEVEL VI RoHS 2011/65 with amendment (EU)2015/863, AfPS GS 2014: 01 Par. 3.1, EN 61000-3-2: 2014, EN 61000-3-3: 2013, IEC 61000-4-2: 2008, IEC 61000-4-3: 2020, IEC 61000-4-4: 2012, IEC 61000-4-5: 2014+A1: 2017, IEC 61000-4-6: 2013+C1: 2015, IEC 61000-4-8: 2009, IEC 61000-4-11: 2020+C1: 2020, EN 55032: 2015+A11: 2020 Class B, EN 55035: 2017+A11: 2020, EN 62368-1:2014+A11</p>	
Specifications	Test conditions	$T_A = 25\text{ }^{\circ}\text{C}$
Input	Input voltage	AC 100 – 240 V, $\pm 10\%$, 47 – 63 Hz
	Power consumption, no load	< 0.3 W typ.
	Power consumption, max. load	20 W max.
	Inrush current	max. 65 A @ AC 230 V, 25 $^{\circ}\text{C}$ max. 35 A @ AC 115 V, 25 $^{\circ}\text{C}$
Output	Output voltage	DC ± 15 V, +8%, -2%
	Output current	+500 mA / -400 mA max.
	Ripple and noise	15 mV _{RMS} typ. (@ +500 mA / -400 mA load)
Protections	Insulation voltage, prim./sec.	DC 4242 V
	Insulation resistance, prim./sec.	$\geq 50\text{ M}\Omega$
	Overload protection	short-circuit-proof
	No load protection	idle-running-proof
	Electrical construction	class II
Case	Material	plastic housing
	Device socket, main	small power socket, IEC-60320-C8
	Color	black
	Dimensions	106 mm x 67 mm x 36 mm (L x W x H)
	Weight	ca. 350 g / 0.77 lbs (including AC power cord)
Ambient Conditions	Storage temperature	-40 $^{\circ}\text{C}$... +85 $^{\circ}\text{C}$
	Operating ambient temperature	0 $^{\circ}\text{C}$... +40 $^{\circ}\text{C}$
	Air humidity	0 % ... 95 % (non-condensing)

Power Supply for FEMTO Amplifier Modules

Connector/Cable


AC input cord
AUS-version

VDE, 2 x 0.75 mm², black
AUS-plug, type I AS 3112 (2 pin) to Euro 8, IEC-60320-C7

DC output cord
DC output connector

22AWG, black
Lemo® series 1S, 3-pol
(plug type: FFA.1S.303.CLAC52)

Connector pin assignment



Scope of Delivery


PS-15-25-L (AUS), AC power cord, datasheet, transport package

Ordering Information

PS-15-25-L (AUS) power supply for FEMTO amplifier modules

Dimensions

PS-15-25-L (AUS)

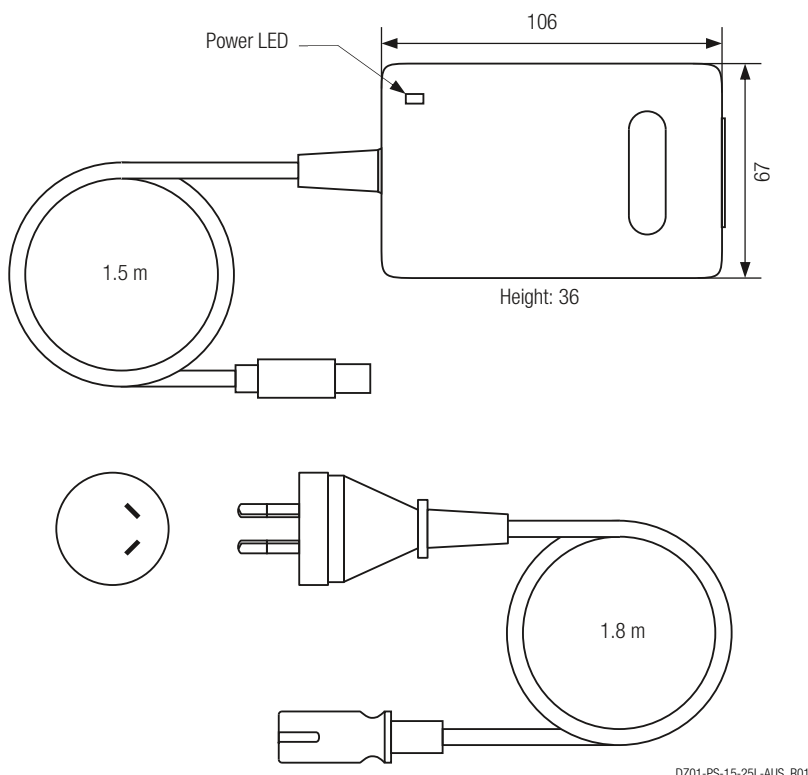

all dimensions in mm unless otherwise noted

DZ01-PS-15-25L-AUS_R01

FEMTO Messtechnik GmbH
Klosterstr. 64
10179 Berlin · Germany
Phone: +49 30 280 4711-0
Fax: +49 30 280 4711-11
Email: info@femto.de
www.femto.de

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany